


# LHN-14-XX-U-IV

Keyway

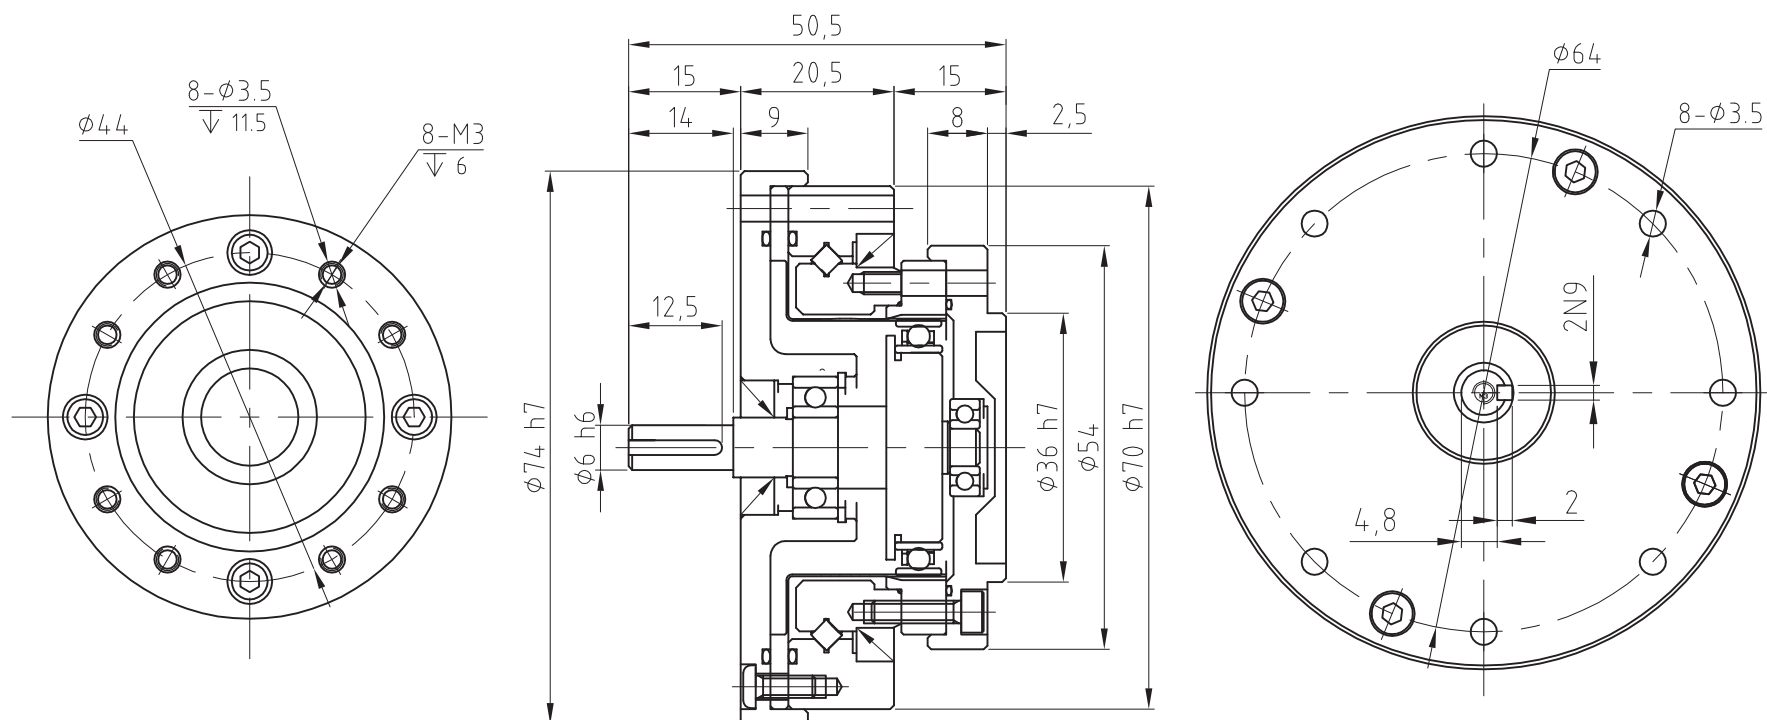

 **Laifual Drive**

Model	Reduction ratio	Rated torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed(Grease)	Permissible average input rotational speed(Grease)	Backlash	Desian life
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	Hour
14	50	5.4	0.55	18	1.8	6.9	0.70	35	3.6	8500	3500	$\leq 20$	10000
	80	7.8	0.80	23	2.4	11	1.1	47	4.8				15000
	100	7.8	0.80	28	2.9	11	1.1	54	5.5				15000
	120	7.8	0.80	28	2.9	11	1.1	54	5.5				15000

## Technical Requirements:

- 1.Please use the grease specified by our company (LF-2 or F-3).
- 2.The \* in the drawing is the installation reference size, please follow the installation size requirements.
- 3.For details of size, please confirm with the delivery specification drawings.